


VENT WASH₂O

VENT WASH₂O



抽氣煙罩 Grease Extraction Ventilator

運水煙罩是一套水循環的抽氣系統，專為產生高油量的廚房而設。灑水系統將煙罩與排氣道分隔，並使廢氣溫度降低，減低火災風險。同時此系統更能降低爐具附近的溫度，為廚師提供更佳的工作環境。另備油網過濾式煙罩，供西式廚房或低油煙量的爐具使用。

VENTWASH₂O Hydro-Washing Ventilation Hood is a water-recycling ventilation system for heavy duty use kitchen. The spraying system separates the hood and the exhaust duct to minimize the fire hazard under high temperature exposure. Besides, this system helps reducing kitchen temperature, which provides a better working environment. Grease Filter Type Hood is also available for western kitchen or equipment with lower fume emission.



Grease Extraction Ventilator 廚房抽氣設備

Vent Wash₂O focuses on supplying grease extraction ventilator. The control panel operates automatically and significantly reduces oil molecules in the air as well as driving down the kitchen temperature. It is the best partner for a hygienic kitchen.

Vent Wash₂O為本公司抽氣設備的著名品牌。控制箱全自動操作，能全面地隔除油份，同時有效降低空氣中懸浮油煙分子和廚房溫度，是潔淨廚房的最佳選擇

抽氣煙罩 / Grease Extraction Ventilator

運水煙罩控制箱 - 掛牆式

Control Box for Hydro-Washing Hood - Wall mounted Type



VW1001W-05S

Model 型號	Dimension(mm) 尺寸(毫米)			Max. Hood Length 煙罩 最長長度	Loading (kW) 耗電量(千瓦)
	W	D	H		
VW1001W-05S	745	250	600	< 5m	0.8

SPEC / 規格
P.89

運水煙罩控制箱 - 座地式

Control Box for Hydro-Washing Hood - Floor Type



VW2041B-06S / VW2042B-12S /
VW4041B-12S / VW4042B-20S

Model 型號	Dimension (mm) 尺寸(毫米)			Max. Hood Length 煙罩 最長長度	Loading (kW) 耗電量(千瓦)
	W	D	H		
VW2041B-06S	612	605	1820	< 6m	0.8
VW2042B-12S	612	605	1820	6 - 12m	0.8 x 2 = 1.6
VW4041B-12S	612	605	1820	6 - 12m	1.0
VW4042B-20S	612	605	1820	12 - 20m	1.0 x 2 = 2.0

SPEC / 規格
P.89

抽氣煙罩

Grease Extraction Ventilator




Hydro-washing Type
運水式

Grease Filter Type -Box
方型油網式

Model* 型號	Dimension (mm) 尺寸(毫米)			Remarks 備註
	W	D	H	
/	/	/	0.683	Hydro-Washing Type (運水式)
/	/	/	0.66	Grease Filter Type (油網式)

*Custom-made sizes for hood 煙罩是特造尺寸
Optional fresh air supply duct 可另加鮮風管
Control box must be equipped for hydro-washing type hood
所有運水式煙罩要配控制箱才能使用

SPEC / 規格
P.78

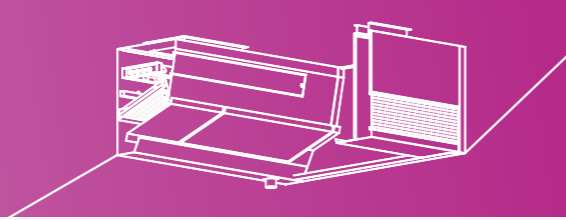

紫外光高效能除油煙罩 High Performance UV Grease Extraction Hood

紫外光高效能除油系統配備高效能UV-C氧化除油科技，能有效去除油煙中的大部份油份子、氣味及細菌。此系統集安全性、可靠性及降低營運成本於一身，按不同的客戶需要而建議不同的方案。


VENTWASH₂O UV Grease Extraction Hoods applied the UV-C oxidation technologies, which can eliminate grease, odor and bacteria effectively from the exhaust. The exhaust system improves safety, reliability, performance and cost efficiency. It can also provide different solutions according customers' needs.



All VENTWASH₂O UV extraction hood equips with a UV-tronic control center for easy operation, control and maintenance
所有紫外光除油煙罩皆配備UV-Tronic 監控系統以便操作、控制及維修

UVW-100/200 /300/400
UVC-100




紫外光高效能除油系統效率比較
Efficiency for UV Grease Extraction System

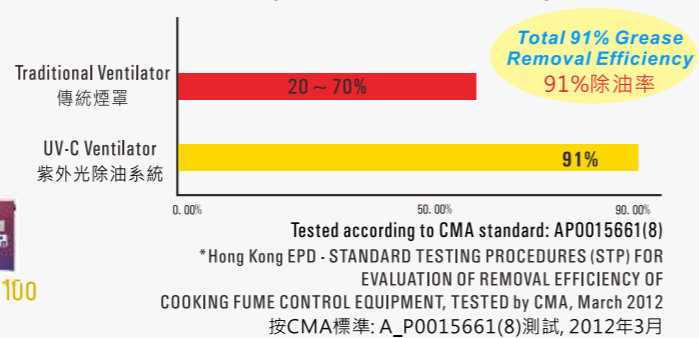

使用紫外光高效能除油系統的優點 Advantages for UV Grease Extraction System

- 油煙及氣味在UV-C氧化光解過程中的會分解成為無害無氣味的物質或微量分子，達致環保的效果
 - 通過UV-C氧化光解原理高達91%的除油率效果，大大降低潛在的火災風險，同時改善煙罩及抽氣管道的潔淨程度，減低清洗抽氣系統的次數，達致節省成本的目的。
 - 鹼油及用水量明顯減少，大大地節省營運成本
 - 產品設計簡單及耐用，減少維修次數及費用
- Oil and odor are breakdown into harmless molecule through UV-C oxidation process, achieve environmental friendly results.
 - Improve the cleanness of canopy and exhaust duct due to 91% oil removal efficiency. Minimize potential fire hazard as well as massive cost-saving for cleaning up and duct maintenance.
 - Saving maintenance for the operational cost from less detergent and water consumption.
 - Improved in reliability reduce maintenance frequency and cost.

型號介紹 Model Guide



UVEC (Entry Level/入門級)

- UPE Double layers of Ultra Performance Extractor 雙層高效能隔油網
- UV-C oxidation 配備UV-C紫外光除油功能

UVES

- UPE Double layers of Ultra Performance Extractor 雙層高效能隔油網
- UV-C oxidation 配備UV-C紫外光除油功能
- Front face air supply discharge plenum 配鮮風喉位

UVWE

- UPE Double layers of Ultra Performance Extractor 雙層高效能隔油網
- UV-C oxidation 配備UV-C紫外光除油功能
- Water wash clean-in-place technologies 自動水洗功能

UVWS (Comprehensive Level / 專業級)

- UPE Double layers of Ultra Performance Extractor 雙層高效能隔油網
- UV-C oxidation 配備UV-C紫外光除油功能
- Front face air supply discharge plenum 配鮮風喉位
- Water wash clean-in-place technologies 自動水洗功能

SPEC / 規格
P.89



Instantaneous Water Boiler 電熱開水器系列

Instant-Mate instantaneous water boilers are designed with the principle "More Durable, More Prompt, More Concise and More Variety". The machine is made up of S/S exterior with insulation. Water can be rapidly heated up to 92°C as well as saving up to 30%-50% of power consumption.

捷寶牌開水器以「更耐用、更快捷、更省電、更易用和款式多樣化」為依歸。產品全為不銹鋼設計，美觀耐用，適合各種場合使用。水溫可快速升至92°C，並節省用電量高達30%-50%，為各大用家首選。